

Žica u rinfuzi / Bulk wire



PALJENA žica / ANNEALED wire

Debljina / Thickness (mm)	Težina / Weight (kg)
1,2	5
1,4	
3,1	
0,80	50
1,20	
1,40	
1,60	
1,80	
2,00	100
2,20	
2,50	
2,80	
3,10	
3,40	
3,80	
4,20	

POCINAČANA žica / GALVANIZED wire

Zn

Debljina / Thickness (mm)	Težina / Weight (kg)
1,00	50
1,20	
1,40	
1,60	
1,80	
2,00	250
2,20	
2,50	
2,80	
3,10	
3,50	
4,00	
5,00	
6,00	

PLASTIFICIRANA žica / PVC COATED wire



RAL 6005

PVC

Debljina / Thickness (mm)	Težina / Weight (kg)
1,80/2,80	250
2,00/3,00	



OGRADNI SISTEMI
FENCE SYSTEMS



OGRADNI SISTEMI

PANELI

Panel Brico Hercules

Zbog svoje velike čvrstoće idealan je za ograđivanje objekata-poduzeća, škola, vrtića, privatnih posjeda i sl. Paneli pocinčani min. 40 gr/m² + plastificirani. Izrađuju se od svjetlovučene žice. Plastifikacija sa 10-godišnjim jamstvom.

Panel M

Paneli su cinčani + plastificirani. Izrađuju se od svjetlovučene žice. Plastifikacija sa 10-godišnjim jamstvom.

Panel Mobilni

Potrebno vam je privremeno ograđivanje prostora? Mobilni paneli idealno su rješenje za sve potrebe privremenog ograđivanja prostora, ograđivanja prostora gradilišta, prostora eventa i dr. Uz jednostavnu i brzu montažu ogradite velike prostore u iznimno kratkom vremenu. Svi mobilni paneli mogu uz dodatak postati vrata, što uvelike olakšava situacije gdje ulaz/izlaz u prostor mora biti fleksibilan.

ŽIČANA PLETIVA I MREŽE

Univerzalno pletivo -pocinčano (Zn)

Primjenjuje se najviše za ograđivanje voćnjaka, vinograda i okućnica. Izrađuje se od pocinčane žice debljine od 1,8 mm do 2,2 mm.

Univerzalno pletivo-plastificirano (PVC)

Primjenjuje se najviše za ograđivanje voćnjaka, sportskih terena, vinograda i okućnica. Izrađuje se od Zn/PVC žice debljine 1,8 mm/2,8 mm.

Jarditor pletivo

Punktirana plastificirana zavarena ograda. Izrađuje se od Zn/PVC žice debljine 1,6/2,10 mm. Primjenjuje se za ograđivanje vrtova i okućnica, poslovnih objekata.

Farmer pletivo

Idealno rješenje za ograđivanje farmi, pašnjaka, auto cesta, lovišta. Izrađuje se od 3x pletene pocinčane žice (pletanjem).

FENCE SYSTEMS

PANELS

Brico Hercules panel

Due to its great strength, it is ideal for enclosing facilities/companies, schools, kindergartens, private properties etc. Galvanized panels of a min. 40 gr/m² + PVC coating. They are constructed using bright drawn wire. PVC coating with a 10-year warranty.

M Panel

Panels are galvanized and PVC coated. They are constructed using bright drawn wire. PVC coating with a 10-year warranty.

Mobile Panel

Do you need to temporarily enclose an area? Mobile panels are the ideal solution for any needs involving temporary enclosing of areas, enclosing of construction sites, event areas and such. Thanks to their simple and quick assembly, you can enclose large areas in no time. With the help of additions, all mobile panels can also become doors, which significantly simplifies situations where the entry/exit from an area must remain flexible.

WIRE NETTINGS AND MESHES

Chain link mesh - galvanized (Zn)

It is used mostly for fencing orchards, vineyards and curtilages. It is made from galvanized wire which is 1.8 mm to 2.2 mm thick.

Chain link mesh - coated (PVC)

It is used mostly for fencing orchards, sports courts, vineyards and curtilages. It is made from galvanized/PVC wire which is 1.8 mm/2.8 mm thick.

Jarditor Netting

Punched PVC coated welded fence. It is made from galvanized/PVC wire which is 1.6 mm - 2.10 mm thick. It is used for fencing gardens and curtilages, as well as business facilities.

Field fence Netting

It is an ideal solution for fencing farms, pastures, motorways, hunting grounds. It is made from 3x woven galvanized wire (weaving).

OGRADNI SISTEMI

Floritor pletivo

Primjenjuje se za zaštitu i označavanje cvjetnih gredica, vrtova. Izrađuje se od Zn/PVC žice, debljinom vodoravnih žica 1.5/2.0 mm, te okomite žica debljine 2.0/3.0 mm.

Merkur pletivo

Izrađuju se od pocinčane žice debljine 0,70 mm-1,2 mm. Upotrebljava se kod ograđivanja sadnica i voćaka, uzgoj malih životinja te izradu vrša.

Rabitz mreža

Elektrovareno pocinčano pletivo. Upotrebljava se kod izrade betonskih glazura-estriha. Artikli su dostupni u rolama i pločama.

Vibro pletivo-tkano pletivo

Izrađuje se od svjetlovučene žice. Isporučuju se u pločama raznih dimenzija. Primjenjuje se pri izradi ograda, vrata i sl.



FENCE SYSTEMS

Floritor Netting

It is used for protecting and marking flower beds and gardens. It is made from Zn/PVC wire, with horizontal wires that are 1.5/2.0-mm thick and vertical wires that are 2.0/3.0-mm thick.

Hexagonal mesh

It is made from galvanized wire which is 0.70 mm -1.2 mm thick. It is used for fencing of saplings and fruit trees, small animals husbandry and construction of fish traps.

Rabitz Mesh - Electro welded

Electro-welded galvanized netting. Used in the construction of concrete glaze or screed. Items are available in rolls or panels.

Woven Netting

It is constructed using bright drawn wire. It is delivered in panels of various sizes. Used in construction of fences, doors and such.

OGRADNI SISTEMI

STUPOVI

Stup M 50x50

Površinska zaštita: pocinčan + plastificiran. Izrađuju se od šavnih cijevi. Upotrebljava se kod montaže: Brico Hercules i M panela.

Stup M 50x50 sa čeličnom bazom

Površinska zaštita: pocinčan + plastificiran. Izrađuju se od šavnih cijevi. Kod ugradnje se montira na betonski temelj (ograde) sa sidrenim vijcima. Upotrebljava se kod montaže: Brico Hercules i M panela.

Stup Hercules

Stup za panel sa kapom, pocinčan+plastificirani. Izrađuju se od šavnih cijevi. Kod ugradnje se montira u betonski temelj (ograde) ili na betonski temelj (ograde) u kombinaciji s aluminijskom bazom. Upotrebljava se kod montaže: Brico Hercules i M panela. Plastifikacija sa 10-godišnjim jamstvom.

FENCE SYSTEMS

POSTS

50x50 M post

Surface protection: galvanized + PVC coated. They are constructed using welded pipes. Used in the mounting of: Brico Hercules and M panels.

50x50 M post with a steel base

Surface protection: galvanized + PVC coated. They are constructed using welded pipes. During assembly, it is mounted onto a (fence) concrete foundation using anchor bolts. Used in the mounting of: Brico Hercules and M panels.

Hercules post

Panel post with a cap, galvanized + PVC coated. They are constructed using welded pipes. During assembly, it is mounted onto a (fence) concrete foundation or a (fence) concrete foundation combined with an aluminium base. Used in the mounting of: Brico Hercules and M panels. PVC coating with a 10-year warranty.



OGRADNI SISTEMI

Stup Quickfix

Idealan za ograđivanje vašeg vrta, okućnice. Okrugli profil sa vodilicom. Površinska zaštita: pocinčani + plastificirani. Izrađuju se od okruglih (profiliranih) šavnih cijevi. Kod ugradnje se montira u betonski temelj (ograde) ili na betonski temelj (ograde) u kombinaciji s poliamid bazom. Upotrebljava se kod montaže: Brico Hercules i M panela, Univerzalnog pletiva (plastificiranog), Jarditor pletiva.

Stup Quickfix potporni

Površinska zaštita: pocinčani + plastificirani. Izrađuju se od okruglih (profiliranih) šavnih cijevi. Kod ugradnje se montira kao potporni stup u betonski temelj-ograde kao prvi(početni), središnji i kutni stup ograde. Upotrebljava se kod montaže: Univerzalnog pletiva, Jarditor pletiva. Plastifikacija sa 10-godišnjim jamstvom.

“T” stup

Upotrebljava se kod montaže različitih vrsta pletiva gdje se montira u betonski temelj (ograde) ili fizičkim zabijanjem u zemljinu površinu bez upotrebe vezivnog materijala(betona). Upotrebljava se kod montaže: Univerzalnog pletiva (plastificiranog), Jarditor pletiva. Plastifikacija sa 10-godišnjim jamstvom.

“T” stup potporni

Koristi se u kombinaciji sa “T” stupom. Površinska zaštita: pocinčano + plastificirano. Plastifikacija sa 10-godišnjim jamstvom.

Stup za vinograd “Omega”

Upotrebljava se u vinogradarstvu, voćarstvu i sl. Upotrebljava se kod montaže: Univerzalnog pletiva (pocinčanog), Farmer pletiva.

FENCE SYSTEMS

Quickfix post

Ideal for fencing your garden and curtilage. Circular profile with a guide. Surface protection: galvanized + PVC coated. They are constructed using round welded pipes. During assembly, it is mounted onto a (fence) concrete foundation or a (fence) concrete foundation combined with a polyamide base. Used in the mounting of: Brico Hercules and M panels, universal netting (PVC coated), Jarditor netting.

Quickfix support post

Surface protection: galvanized + PVC coated. They are constructed using round welded pipes. During assembly, it is mounted as a support post onto a fence concrete foundation as the starting (initial), central and angle post of the fence. Used in the mounting of: universal netting, Jarditor netting. PVC coating with a 10-year warranty.

“T” post

It is used in the assembly of various types of netting where it is mounted onto a (fence) concrete foundation or physically rammed into the soil without using any bonding material (concrete). Used in the mounting of: universal netting (PVC coated), Jarditor netting. PVC coating with a 10-year warranty.

“T” support post

Used in combination with a “T” post. Surface protection: galvanized + PVC coated. PVC coating with a 10-year warranty.

Vineyard “Omega” post

It is used in viticulture, pomiculture and such. Used in the mounting of: universal netting (galvanized), Farmer netting.

OGRADNI SISTEMI

VRATA

Vrata Eco

Idealna za ograđivanje okućnica i vrtova. Primjena kod ograđenih površina gdje nije potrebno zaključavanje. Plastifikacija sa 10-godišnjim jamstvom.

Vrata Residencial

Idealna za ograđivanje okućnica i vrtova. Dostupna boja zelena, Ral 6005. Plastifikacija sa 10-godišnjim jamstvom.

Vrata M

Idealna za ograđivanje okućnica i vrtova. Napomena: podesive spojnice;kvaka i brava sa ključem;plastificirano. Idealna za montažu na/u betonski temelj ograde.

Vrata M sa bazom

SPOJNI PRIBOR

Inox spojnica

Upotrebljava se kod montaže Univerzalnog pletiva, Jarditor pletiva, Farmer pletiva na Quickfix stup.

Quickfix spojnice

Dostupne u metalnoj i poliamid varijanti. Koristi se za učvršćivanje potpornih Quickfix stupova i natezača na stup. Upotrebljava se kod montaže: Brico Hercules i M panela u kombinaciji sa Quickfix stupovima.

Tračna spojnica

Metalna spojnica za pričvršćivanje panela na Hercules stup. Brza i jednostavna montaža. Zaštita pocinčano + plastificirano. Upotrebljava se kod montaže: Brico Hercules i M panela. Plastifikacija sa 10-godišnjim jamstvom.

Hercules spojnica

Poliamidna spojnica se primjenjuje kod montaže panela na stupove Hercules. Brza i jednostavna montaža. Upotrebljava se kod montaže: Brico Hercules i M panela. Plastifikacija sa 10-godišnjim jamstvom.

FENCE SYSTEMS

DOORS

Eco doors

Ideal for enclosing curtilages and gardens. They are used in enclosed areas where locking up is not necessary. PVC coating with a 10-year warranty.

Residencial doors

Ideal for enclosing curtilages and gardens. Available in green, Ral 6005. PVC coating with a 10-year warranty.

M doors

Ideal for enclosing curtilages and gardens. Note: adjustable hinges; handle and key lock; PVC coated. Ideal for mounting onto/into a fence concrete foundation.

M doors with a base

JOINING ACCESSORIES

Stainless steel clams

It is used in the assembly of universal netting, Jarditor netting or Farmer netting onto the Quickfix post.

Quickfix clams

Available in metal and polyamide versions. They are used for fastening Quickfix support posts and strainers onto the post. Used in the mounting of: Brico Hercules and M panels combined with Quickfix posts.

Rail joiner

Metal joiner for fastening panels onto a Hercules post. Quick and easy assembly. Galvanized + PVC coated for protection. Used in the mounting of: Brico Hercules and M panels. PVC coating with a 10-year warranty.

Hercules clams

The polyamide clam is used when mounting panels onto Hercules posts. Quick and easy assembly. Used in the mounting of: Brico Hercules and M panels. PVC coating with a 10-year warranty.

OGRADNI SISTEMI

M spojnica

Dostupne u metalnoj i poliamid varijanti. Upotrebljava se kod montaže: Brico Hercules i M panela (u kombinaciji sa kvadratim stupovima). Montaža: bušenje stjenke stupa sa samourezivim vijkom.

Vodilica žice za vinogradarski stup

Upotrebljava se kod lakše montaže Univerzalnog pletiva na vinogradarski stup.

Poliamidna baza za stup Quickfix

Kod ugradnje se montira na betonski temelj (ograde) u kombinaciji s Quickfix stupom. Upotrebljava se kod montaže: Brico Hercules i M panela. Sa tri sidrena vijka pričvršćuje se na podlogu.

Baza za stup Hercules

Zaštita pocinčano + plastificirano. Kod ugradnje se montira na betonski temelj (ograde) u kombinaciji s Hercules stupom. Upotrebljava se kod montaže: Brico Hercules i M panela Brza i jednostavna montaža na Hercules stup bez dodatnog bušenja. Aluminijska baza za stup Hercules. Sa četiri sidrena vijka pričvršćuje se na podlogu. Plastifikacija sa 10-godišnjim jamstvom.

Betonska baza za mobilni panel

Primjenjuje se kod postavljanja mobilnih panela.

Natezači za žicu

Primjenjuju se kod montaže Univerzal pletiva za natezanje nosive žice. Dostupni cinčani i cinčani+bojani.

Napinjači za žicu

Primjenju se kod montaže Univerzal pletiva. Dostupni u više veličina. Najveća primjena u vinogradarstvu i voćarstvu za napinjanje nosive žice.

Kliješta za inox spojnice

Za pričvršćivanje inox spojnice na vodilicu Quickfix stupa.

FENCE SYSTEMS

M clams

Available in metal and polyamide versions. Used in the mounting of: Brico Hercules and M panels (combined with rectangular posts). Assembly: drilling the post wall with a self-tapping screw.

Wire guide for a vineyard post

It is used to facilitate the assembly of the universal netting onto a vineyard post.

Polyamide base for the Quickfix post

During assembly, it is mounted on a (fence) concrete foundation using a Quickfix post. Used in the mounting of: Brico Hercules and M panels. It is fastened to the substrate using three anchor bolts.

Base for the Hercules post

Galvanized + PVC coated for protection. During assembly, it is mounted on a (fence) concrete foundation with a Hercules post. Used in the mounting of: Brico Hercules and M panels Quick and easy mounting onto a Hercules post with no additional drilling. Aluminium base for the Hercules post. It is fastened to the substrate using four anchor bolts. PVC coating with a 10-year warranty.

Concrete base for a mobile panel

It is used when placing mobile panels.

Wire strainers

They are used when mounting Univerzal netting in order to strain the support wire. Galvanized or galvanized and painted available.

Turnbuckles

They are used in the mounting of Univerzal netting. They are available in several sizes. The largest area of application is in viticulture and pomiculture for the tensioning of support wires.

Pliers for stainless steel clams

In order to fasten stainless steel clams to the Quickfix post guide.

Univerzalno pletivo - pocinčano / Chain link Mesh - galvanized



Zn Mogućnost izrade: 2,2mm

Visina Zn pletiva Height of galvanized netting (mm)	Promjer žice Wire diameter (mm)	Otvor oka Mesh size (mm)	Dužina role Rolled length (m)
650	2,05	60 x 60	25
800			
1000			
1250			10/25
1500			
2000			25

Univerzalno pletivo EKO - pocinčano / Chain link Mesh EKO - galvanized



Zn

Visina Zn pletiva Height of galvanized netting (mm)	Promjer žice Wire diameter (mm)	Otvor oka Mesh size (mm)	Dužina role Rolled length (m)
1000	1,80	60 x 60	25
1250			
1500			

Univerzalno pletivo - plastificirano / Chain link Mesh - coated



PVC **RAL 6005** Mogućnost izrade:

Visina Zn pletiva Height of coated netting (mm)	Promjer žice Wire diameter (mm)	Otvor oka Mesh size (mm)	Dužina role Rolled length (m)
800	1,80/2,80	60 x 60	25
1000	1,60/2,40		
	1,80/2,80		
1250	1,60/2,40		
	1,80/2,80		
1500	1,60/2,40		
	1,80/2,80		
1750	1,80/2,80		
2000	2,00/3,00		

Farmer pletivo - pocinčano / Field fence Netting - galvanized

Zn



Visina pletiva Height of netting (mm)	Debljina horizontalne i vertikalne žice Horizontal and vertical wire thickness (mm)	Razmak između žica Distance between wire	Dužina role Rolled length (m)
1000	1,90/2,50	15	50
1200			
1520			

Prema upitu kupca moguća je isporuka pletiva debljine žice od 3,0 mm do 4,0 mm
At customer's request, netting with a Wire diameter ranging from 3,0 mm to 4,0 mm can be delivered.

16,5		
12,7		
12,7		
11,4	19,1	
11,4		
10,2	17,8	20,3
10,2	16,5	17,8
8,9	12,7	15,2
8,9	12,7	
7,6	12,7	14,0
6,4	11,4	
6,4		
5,1	11,4	12,7
5,1	10,2	11,4
5,1		
5,1	10,2	10,2
3,8		

152/19/15 120/9/15 100/8/15

Farmer light - pocinčano / Field fence Light - galvanized

Zn



Visina pletiva Height of netting (mm)	Debljina horizontalne i vertikalne žice Horizontal and vertical wire thickness (mm)	Razmak između žica Distance between wire	Dužina role Rolled length (m)
1000	1,6/1,9	15	50
1200			
1500			

Prema upitu kupca moguća je isporuka pletiva debljine žice od 3,0 mm do 4,0 mm
At customer's request, netting with a Wire diameter ranging from 3,0 mm to 4,0 mm can be delivered.

20		
20		
15	20	
15		
10	20	20
10	15	20
10	15	
10	10	15
10	10	15
10	10	10
10	10	10
10	10	10
10	10	10
10	10	10

150/19/15 120/10/15 100/8/15

Merkur pletivo - pocinčano / Hexagonal Netting - galvanized



Zn

Visina Zn pletiva Height of galvanized netting (mm)	Tip Type	Promjer žice Wire diameter (mm)	Dužina role Rolled length (m)
1000	13	0,70	50
1000	16	0,70	50
1000	19	0,75	50
1000	25	1,20	25
1000	31	1,20	25
1000	31	0,80	50

Floritor pletivo - plastificirano / Floritor Netting - coated



PVC

RAL
6005

Visina pletiva Height of netting (mm)	Promjer žice vertikalne Vertical Wire diameter (mm)	Promjer žice horizontalne Horizontal Wire diameter (mm)	Dužina role Rolled length (m)
400	2,0/3,0	1,50/2,00	10 i 25
650			

Panel Brico Hercules



RAL
6005

Dimenzije panela (visina x širina) / Panel dimensions (height x width) (mm)	Otvor oka Mesh size (mm)	Promjer žice Wire diameter (mm)	Broj ojačanja po panelu / Amount of reinforcement per panel (kom) / (pcs)
625 x 2500	100 x 55	4,00	2
825 x 2500			2
1025 x 2500			2
1225 x 2500			2
1525 x 2500			3
2025 x 2500			4

Panel 5 mm




RAL
7016

RAL
6005

Dimenzije panela (visina x širina) / Panel dimensions (height x width) (mm)	Otvor oka Mesh size (mm)	Promjer žice Wire diameter (mm)	Broj ojačanja po panelu / Amount of reinforcement per panel (kom) / (pcs)
830 x 2500	200 x 55	5,00	2
1030 x 2500			2
1230 x 2500			2
1530 x 2500			2
1730 x 2500			3
2030 x 2500			4

Panele debljine žice od 4,50 i 5 mm i otvorom oka 200 mm x 50 mm prema upitu
Per customer inquiry, panels with Wire diameter from 4,50 to 5 mm and Mesh size of
200 mm x 50 mm

Panel 6/5/6



RAL
6005

Height Height (mm)	Otvor oka Mesh size (mm)	Promjer žice Wire diameter (mm)
830	200 x 50	5,00 6,00
1030		
1230		
1430		
1630		
1830		
2030		

Panel ogradni M / M panel for fencing


RAL 7016 **RAL 6005**

Dimenzije panela (visina x širina) / Panel dimensions (height x width) (mm)	Otvor oka Mesh size (mm)	Promjer žice Wire diameter (mm)	Broj ojačanja po panelu / Amount of reinforcement per panel (kom) / (pcs)
830 x 2500	200 x 55	4,00	2
1030 x 2500			2
1230 x 2500			2
1530 x 2500			2
1730 x 2500			3
2030 x 2500			4

Panele debljine žice od 4,50 i 5 mm i otvorom oka 200 mm x 50 mm prema upitu
Per customer inquiry, panels with Wire diameter from 4,50 to 5 mm and Mesh size of
200 mm x 50 mm

Mobilni panel sa okvirom / Mobile panel with frame




Dimenzije panela (visina x širina) Panel dimensions (height x width) (mm)	Otvor oka Mesh size (mm)	Promjer žice Wire diameter (mm)	Vertikalni /horizontalni stupovi Vertical/horizontal posts Ø 40/Ø 30
2000 x 3500	247 x 100	2,8	40

Jarditor Brico - plastificirano / Jarditor Brico - coated


PVC **RAL 6005**

Visina pletiva Height of netting (mm)	Promjer žice Wire diameter (mm)	Otvor oka Mesh size (mm)	Dužina role Rolled length (m)
800	1,60/2,10	100 x 50	25
1000			
1200			
1500			
1800			
2000			

Jarditor - plastificirano / Jarditor - coated


RAL 6005 **PVC**

Visina pletiva Height of netting (mm)	Promjer žice Wire diameter (mm)	Otvor oka Mesh size (mm)	Dužina role Rolled length (m)
1000	1,60/2,10	100 x 75	25
1200			
1500			
1000			
1200			
1500			

Jarditor Classic - plastificirano / Jarditor Classic - coated


RAL 6005 **PVC**


Visina pletiva Height of netting (mm)	Promjer žice Wire diameter (mm)	Otvor oka Mesh size (mm)	Dužina role Rolled length (m)
1000	2,00/2,50	100 x 50	25
1200			
1500			

Rabitz pletivo-pocinčano / Rabitz Netting- Electro welded - galvanized


Zn

Visina Zn pletiva Height of coated netting (mm)	Tip Type	Promjer žice Wire diameter (mm)	Dužina role Rolled length (m)
1000	13 x 13	0,90	25
1000	25 x 25		

Rabitz mreža - pocinčano / Rabitz Mesh- Electro welded - galvanized


Zn

Dimenzija Dimension (mm)	Otvor oka Mesh size (mm)	Promjer žice Wire diameter (mm)
1000 x 2000	50 x 50	1,80

Stup M / M post

RAL 6005 RAL 7016



Visina stupa Post height (mm)	Dimenzija profila Profile dimension (mm)	Debljina lima Sheet metal thickness (mm)
1500	50 x 50	2,00
1730		
2000		
2430		

Dimenzija profila prema upitu: 60x60 / Cross-section dimensions on inquiry: 60x60

Stup M s čeličnom bazom / M post with a steel base

RAL 6005 RAL 7016 RAL 9010



Visina stupa Post height (mm)	Dimenzija profila Profile dimension (mm)	Debljina lima Sheet metal thickness (mm)	Dimenzija stope Foot dimension (mm)
630	50 x 50	1,5	100 x 100 x 5
830			
1030			
1230			
1530			
1730			
2030			

Dimenzija profila prema upitu: 60x60 / Cross-section dimensions on inquiry: 60x60

Stup Hercules / Hercules post

RAL 6005



Visina stupa Post height (mm)	Dimenzija profila Profile dimension (mm)	Debljina lima Sheet metal thickness (mm)
1050	60 x 40	1,50
1250		
1550		
1750		
2050		
2350		
2550		

Stup Quickfix / Quickfix post

RAL 6005



Visina stupa Post height (mm)	Promjer stupa Post diameter (mm)	Debljina lima Sheet metal thickness (mm)
700	48	1,20
900		
1100		
1300		
1500		
1850		
2000		
2350		
2500		

Stup Quickfix potporni / Quickfix support post

RAL 6005



Visina stupa Post height (mm)	Promjer stupa Post diameter (mm)	Debljina lima Sheet metal thickness (mm)
1200	40	1,20
1450		
1800		
2400		

"T"-stup / "T" post

RAL 6005



Visina stupa Post height (mm)	Dimenzija profila Profile dimension (mm)	Debljina lima Sheet metal thickness (mm)
1000	30 x 30	2,70
1200		
1450		
1750		
2000		

"T" Stup potporni / "T" support post

RAL 6005



Visina stupa Post height (mm)	Dimenzija profila Profile dimension (mm)	Debljina lima Sheet metal thickness (mm)
1000	25 x 25	3,0
1200		
1500		
2000		

Stup za vinograd Omega / Vineyard Omega post



Visina stupa Post height (mm)	Dimenzija profila Profile dimension (mm)	Debljina lima Sheet metal thickness (mm)
1500	60 x 40	1,50
1750		
2000		
2400		
2700		

Vrata Eco / Eco doors

RAL
6005

Dimenzije vrata (vxš) Door dimensions (h x w) (mm)	Otvor oka Mesh size (mm)	Promjer žice Wire diameter (mm)	Okvir vrata Door frame (mm)	Promjer stupa Post diameter (mm)
1000 x 1000	200 x 50	4,00	30	48
1200 x 1000				
1500 x 1000				

Vrata Residencial / Residencial doors

RAL
6005

Dimenzije vrata (vxš) Door dimensions (h x w) (mm)	Otvor oka Mesh size (mm)	Promjer žice Wire diameter (mm)	Okvir vrata Door frame (mm)	Promjer stupa Post diameter (mm)
1000 x 1000	100 x 50	4,00	48	48
1200 x 1000				
1500 x 1000				

Vrata M sa čeličnom bazom / M doors with a base

RAL
6005RAL
7016

Dimenzije vrata (vxš) Door dimensions (h x w) (mm)	Otvor oka Mesh size (mm)	Promjer žice Wire diameter (mm)	Okvir vrata Door frame (mm)	Promjer stupa Post diameter (mm)	Dimenzija stope Foot dimension (mm)
1000 x 1000	200 x 50	4,00	50 x 50 x 1,50	50 x 50 x 1,50	150x150
1200 x 1000					
1500 x 1000					

Inox spojnica
Stainless steel clams

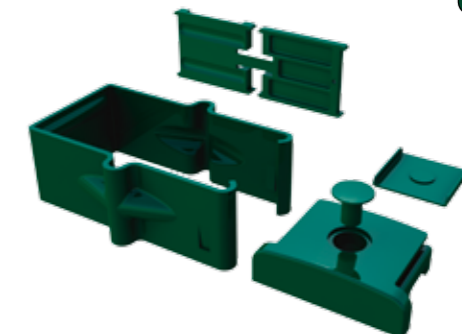
Pogodne za pričvršćivanje ograde za Quick fix stup.
Suitable for fastening fences to a Quickfix post.

100
kom/pcsKliješta za inox spojnice
Pliers for stainless steel clams

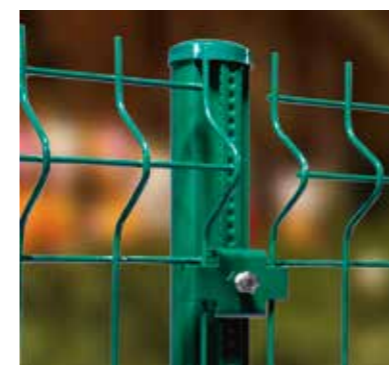
Pričvršćivanje inox spojnice na Quickfix stup.
For fastening stainless steel clams to a Quickfix post.

Hercules spojnica
Hercules clams

Montaža na stup Hercules.
Mounting to a Hercules post.

RAL
6005Hercules ultrafix spojnica
Hercules ultrafix clamsRAL
6005Tračna spojnica
Rail clams

Montaža na stup Quickfix.
Mounting to a Quickfix post.

RAL
6005Spojnica M metalna
Metal M clams

Montaža na stup 50x50 ili 60x60.
Mounting to a 50x50 or 60x60 post.

RAL
6005RAL
7016

Spojnicica M poliamid 6,3 x 39
Polyamide M clams 6,3 x 39

Montaža na stup 50x50 ili 60x60.
Mounting to a 50x50 or 60x60 post.



Spojnicica M za panel sa jedne strane
Clams M for panels on one side



Spojnicica M kutna
Clams M for corners



Spojnicica M za panel sa dvije strane
Clams M for panels on two sides

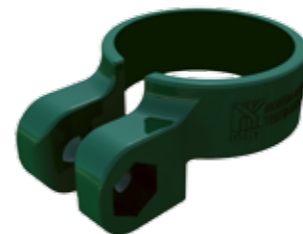


Quickfix spojnice
Polyamide Quickfix clams

Montaža na stup Quickfix.
Mounting to a Quickfix post.



Spojnicica poliamid
Polyamide clams



Čelična tipla (sidreni vijak)
Steel throughbolt (anchor bolt)



Navoj M Thread M (mm)	Dužina L Length L (mm)
10	100
12	110

Baza za stup Quicfix (poliamid)
Base for the Quicfix post (Polyamide)

Postolje za montažu na niskom zidu.
Base for mounting onto a low wall.



Baza za stup Hercules
Base for the Hercules post

Postolje za montažu na niskom zidu.
Base for mounting onto a low wall.



Natezač za žicu
Wire strainer



Spojnicica poliamid Quickfix
Polyamide Quickfix clams



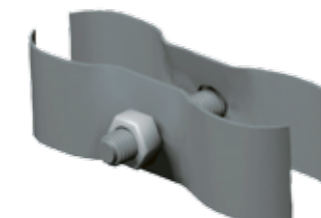
Baza betonska za mobilni panel
Concrete base for a mobile panel



Natezač za žicu bojani
Painted Wire strainer



Sigurnosna spojnicica za mobilni panel
Safety hinges for mobile panels



Čep za stup / Post cap



Tip Type	Dimenzije Dimensions (mm)
Metalni / Metal	40 x 40
Metalni / Metal	50 x 50
Metalni / Metal	60 x 60

Tip Type	Dimenzije Ø Dimensions Ø (mm)
Metalni / Metal	42
Metalni / Metal	48
Metalni / Metal	60

Tip Type	Dimenzije Dimensions (mm)
PVC	30 x 30
PVC	30 x 40
PVC	30 x 50
PVC	30 x 60
PVC	40 x 40
PVC	40 x 60
PVC	50 x 50
PVC	60 x 60

Tip Type	Dimenzije Ø Dimensions Ø (mm)
PVC	30
PVC	40
PVC	50

Zaštita od pogleda / Protection from view



190 mm	
1 kutija / 1 box	26 m
1 m ²	5 m
1 kutija / 1 box	5 m

48 mm	
1 kutija / 1 box	60 m
1 m ²	20 m
1 kutija / 1 box	2,5 m
1 kutija / 1 box	100 spojnica / 100 clips

HTZ oprema / Safety equipment



RADNA ODJEĆA | KIŠNI PROGRAM | ZAŠTITA RUKU | ZAŠTITA NOGU | ZAŠTITA OČIJU
 | VARILAČKI PROGRAM | ZAŠTITA DIŠNIH ORGANA | JEDNOKRATNI PROGRAM
 WORKWEAR | RAIN ASSORTMENT | HAND PROTECTION | FEET PROTECTION | EYE PROTECTION |
 WELDING ASSORTMENT | RESPIRATORY PROTECTION | DISPOSABLE PROTECTION ASSORTMENT

